



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W

SEC 21	SEC 22
SEC 28	SEC 27

U.S.B.&M.


J-13



SCALE: 1"=30'

0' 30'

FOUND A REBAR WITH A 2 1/2"
ALUMINUM DUCHESNE COUNTY
MONUMENT AT 1/4 CORNER

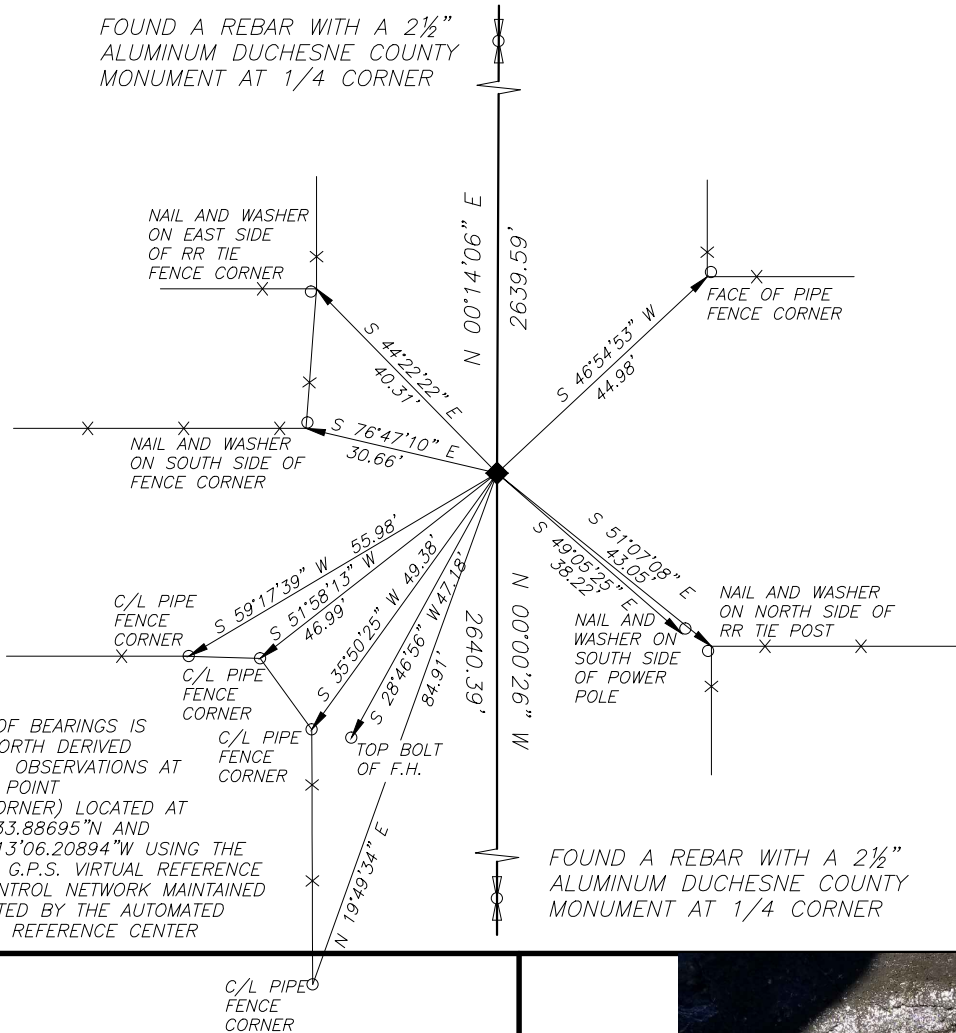

NOTE: THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°21'33.88695"N AND LONG. 110°13'06.20894"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

FOUND A REBAR WITH A 2½"
ALUMINUM DUCHESNE COUNTY
MONUMENT AT 1/4 CORNER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A ALUMINUM DUCHESNE
COUNTY MONUMENT AT THE POSITION
OF THE SECTION CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET A 5/8"X24" REBAR WITH A 2½"
ALUMINUM DUCHESNE COUNTY MONUMENT
AT THE POSITION OF THE SECTION
CORNER AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7307485.580
E: 1997480.585
NAVD88 EL: 6241.10'

LATITUDE: 40°22'26.07667" N
LONGITUDE: 110°13'06.16677" W
ELLIPSOID HEIGHT: 6187.48'
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300010S0030W0_400300



CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed and reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

*Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor*

